



33: Commercial heavy



23: Domestic heavy



2,5mm



42: Light industrial general



33: Commercial heavy



23: Domestic heavy



2,5mm

Designflooring Gluedown

0,3 | 0,55 collection

 **PALIO**
by Designflooring

Palio
Gluedown

PLUS
Palio
Gluedown




Hamden PVP156 | PVP5156



Gluedown: 1218,0mm x 177,8mm



Hamden PVP156 | PVP5156

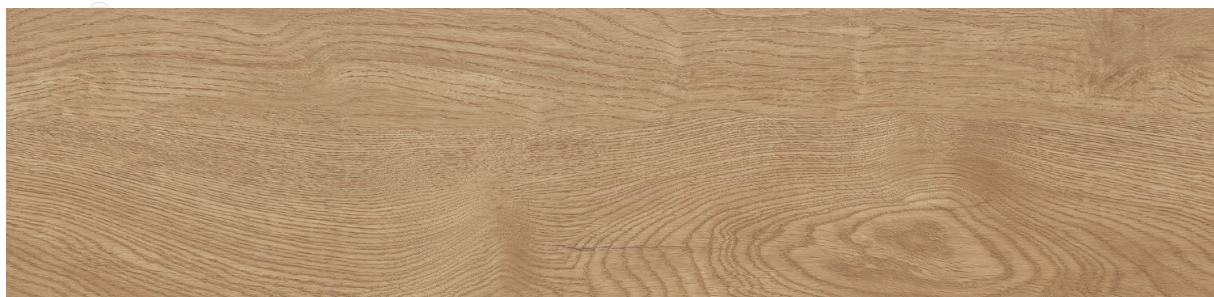

TAVOLARA PVP144 | PVP5144



TAVOLARA PVP144 | PVP5144



Hamden PVPI56 | PVP5156



Gluedown: 1218,0mm x 177,8mm



TORCELLO PVPI45 | PVP5145



BUDELLI PVPI46 | PVP5146



BUDELLI PVPI46 | PVP5146



TORCELLO PVP145 | PVP5145



Gluedown: 1218,0mm x 177,8mm



BRIDGEPORT PVP157 | PVP5157



LAMPIONE PVP147 | PVP5147



BRIDGEPORT PVP157 | PVP5157




LAMPIONE PVP147 | PVP5147



Gluedown: 1218,0mm x 177,8mm



BROCKTON PVPI53 | PVP5153

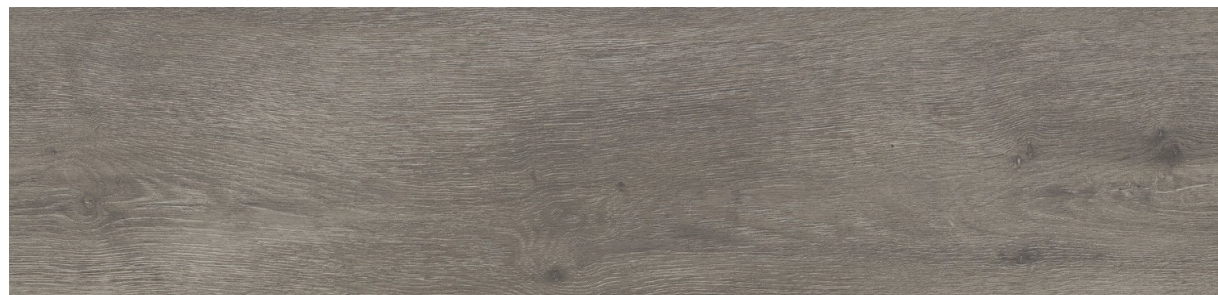

LINOSA PVPI48 | PVP5148



BROCKTON PVPI53 | PVP5153




LINOSA PVP148 | PVP5148

Technical specification

	STANDARD	PALIO GLUEDOWN RESULT	PALIO GLUEDOWN PLUS RESULT
 SIZE	EN ISO 24342	1219,2 x 177,8mm	1219,2mm x 177,8mm
 THICKNESS	EN ISO 24346	2,0 mm	2,5mm
 WEAR LAYER	EN ISO 24340	0,3 mm	0,55mm
BOX QUANTITY (PIECES/ M²)		22 planks/ 4,769m²	18 planks/ 3,902m²
SURFACE TREATMENT		PU coating	PU Coating
GUARANTEE¹	Light industrial Commercial Residential	N/A 10 years 20 years	15 years 15 years 20 years
CLASSIFICATION	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	N/A 31: Commercial moderate 23: Domestic heavy	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
 ACOUSTIC IMPACT NOISE REDUCTION	EN ISO 717-2/EN ISO 140-8	$\Delta L_w = 1$ dB	$\Delta L_w = 2$ dB
 THERMAL RESISTANCE	ISO 8302	0,0107 m²K/W Suitable for underfloor heating. Max 27°C	0,0126 m²K/W Suitable for underfloor heating. Max 27°C
 SLIP RESISTANCE²	EN 13893 DIN 51130	DS R10	DS R10
 ENVIRONMENTAL	French VOC regulation (ISO 16000)	A+	R10
	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.	
	Floorscore SCS-ECIO.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.	
	DiBt/AgBB	Pass	
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standards	

¹ Subject to terms. Please see our website.

² Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.



IT'S A NEW DAY

AND WE'RE COMMITTED TO CREATING A BETTER TOMORROW.

Designflooring Evolve® is not only about the planet, but it's about the people too.



Manufactured in ISO 9001 certified facilities for guaranteed quality



Accredited by Sedex for ethical and sustainable manufacturing



Up to 50% recycled material in the backing layer



Designed for durability to extend the lifecycle of your materials



Eurofins Indoor Air Comfort (Gold) certified



To read about Designflooring Evolve™ in French, German, Polish or Dutch simply scan the QR code.